

# 4052

# BEMLIGHT

## MATIERES

Aluminium

## PUISSANCES

De 6W à 108,2W

## DIMENSIONS

65x75mm

## LUMENS

De 1100Lm à 19800Lm

## DUREE DE VIE

50.000h L90B50

80.000h L90B10

## IP et IK

IP20/IK05 | IP40/IK05

## K et IRC

2700k,3000k,4000k,5000k,6500k | IRC 90

2700k,3000k,4000k | IRC90 (Version L90B10)

## UGR


...

## OPTIONS

DALI ...

## PROVENANCE

Fabriqué au Portugal

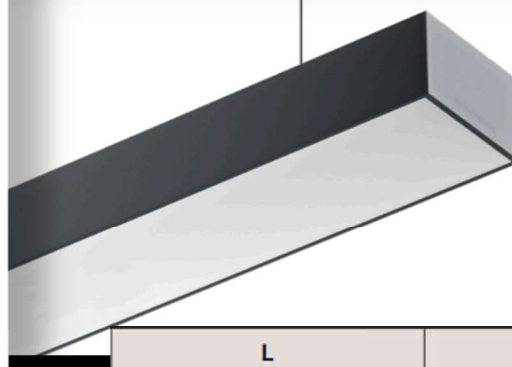

L (mm)	Flow/Power (approx. 183lm/W)
290	1100 lm
430	1650 lm
570	2200 lm
710	2750 lm
850	3300 lm
990	3850 lm
1130	4400 lm
1270	4950 lm
1410	5500 lm
1550	6050 lm
1690	6600 lm
1830	7150 lm
1970	7700 lm
2110	8250 lm
2250	8800 lm
2390	9350 lm
2530	9900 lm
2670	10450 lm
2810	11000 lm
2950	11550 lm
3090	12100 lm
3230	12650 lm
3370	13200 lm
3510	13750 lm
3650	14300 lm
3790	14850 lm
3930	15400 lm
4070	15950 lm
4210	16500 lm
4350	17050 lm
4490	17600 lm
4630	18150 lm
4770	18700 lm
4910	19250 lm
5050	19800 lm

