

4053

BEMLIGHT

MATIERES

Aluminium

PUISSANCES

De 6W à 108,2W

DIMENSIONS

100x90mm

LUMENS

De 1100Lm à 19800Lm

DUREE DE VIE

50.000h L90B50

80.000h L90B10

IP et IK

IP20/IK05 | IP40/IK05

K et IRC

2700k,3000k,4000k,5000k,6500k | IRC 90

2700k,3000k,4000k | IRC90 (Version L90B10)

UGR


...

OPTIONS

DALI ...

PROVENANCE

Fabriqué au Portugal

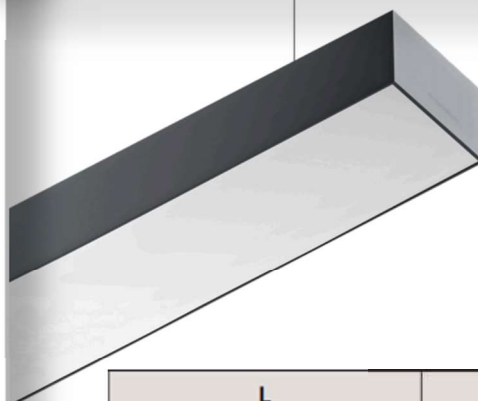

| L (mm) | Flow/Power (approx. 183lm/W) |
|-----------|---------------------------------|
| 290 | 1100 lm |
| 430 | 1650 lm |
| 570 | 2200 lm |
| 710 | 2750 lm |
| 850 | 3300 lm |
| 990 | 3850 lm |
| 1130 | 4400 lm |
| 1270 | 4950 lm |
| 1410 | 5500 lm |
| 1550 | 6050 lm |
| 1690 | 6600 lm |
| 1830 | 7150 lm |
| 1970 | 7700 lm |
| 2110 | 8250 lm |
| 2250 | 8800 lm |
| 2390 | 9350 lm |
| 2530 | 9900 lm |
| 2670 | 10450 lm |
| 2810 | 11000 lm |
| 2950 | 11550 lm |
| 3090 | 12100 lm |
| 3230 | 12650 lm |
| 3370 | 13200 lm |
| 3510 | 13750 lm |
| 3650 | 14300 lm |
| 3790 | 14850 lm |
| 3930 | 15400 lm |
| 4070 | 15950 lm |
| 4210 | 16500 lm |
| 4350 | 17050 lm |
| 4490 | 17600 lm |
| 4630 | 18150 lm |
| 4770 | 18700 lm |
| 4910 | 19250 lm |
| 5050 | 19800 lm |

