

4530/4531

BEMLIGHT

MATIERES

Aluminium

PUISSANCES

De 2,7W à 66,6W

DIMENSIONS

36x25mm

LUMENS

De 490Lm à 12250Lm

DUREE DE VIE

50.000h L90B50

54.400h L70

80.000h L70B10

IP et IK

IP40/IK05 | IP65/IK05

K et IRC

2700k,3000k,4000k,5000k,6500k | IRC>80 (Version L80B10)

2700k,3000k,4000k,6500k | IRC80 (Version L70)

2700k,3000k,4000k,6000k | IRC>90 (Version L70B10)

UGR


...

OPTIONS

DALI, Driver, ...

PROVENANCE

Fabriqué au Portugal

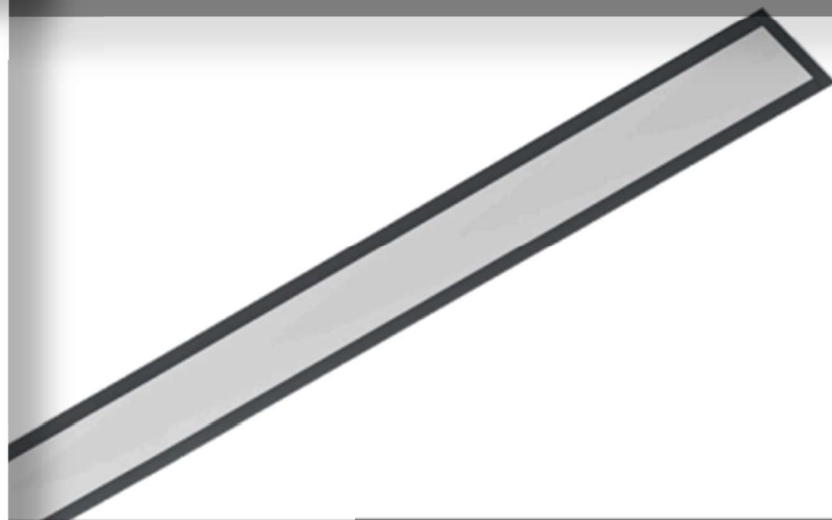

L1 (mm)	L2 (mm)	Flow/Power (approx. 184lm/W)
155	163	490 lm
295	303	980 lm
435	443	1470 lm
575	583	1960 lm
715	723	2450 lm
855	863	2940 lm
995	1003	3430 lm
1135	1143	3920 lm
1275	1283	4410 lm
1415	1423	4900 lm
1555	1563	5390 lm
1695	1703	5880 lm
1835	1843	6370 lm
1975	1983	6860 lm
2115	2123	7350 lm
2255	2263	7840 lm
2395	2403	8330 lm
2535	2543	8820 lm
2675	2683	9310 lm
2815	2823	9800 lm
2955	2963	10290 lm
3095	3103	10780 lm
3235	3243	11270 lm
3375	3383	11760 lm
3515	3523	12250 lm





5mm
aba  L1x27mm



L1 (mm)

L2 (mm)

 25mm
36mm

 L1x27mm