

# 4540/4541

# BEMLIGHT

## MATIERES

Aluminium

## PUISSANCES

De 2,7W à 66,6WW

## DIMENSIONS

26x25mm

## LUMENS

De 490Lm à 12250Lm

## DUREE DE VIE

50.000h L70

54.400h L70B10

80.000h L80B10

## IP et IK

IP40/IK04 | IP65/IK04

## K et IRC

2700k,3000k,4000k,5000k,6500k | IRC  
>80(Version L80B10)

2700k,3000k,4000k,6500k | IRC80(Version  
L70)

2700k,3000k,4000k,6500k | IRC>90(Version  
L70B10)

## UGR


...

## OPTIONS

DALI ...

## PROVENANCE

Fabriqué au Portugal

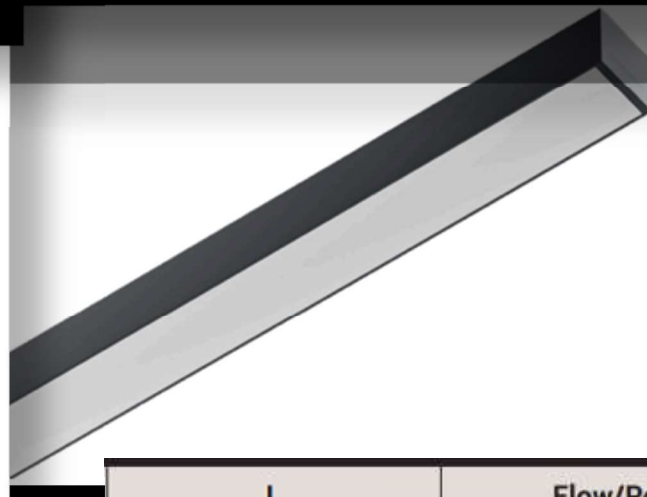

L (mm)	Flow/Power (approx. 184lm/W)
155	490 lm
295	980 lm
435	1470 lm
575	1960 lm
715	2450 lm
855	2940 lm
995	3430 lm
1135	3920 lm
1275	4410 lm
1415	4900 lm
1555	5390 lm
1695	5880 lm
1835	6370 lm
1975	6860 lm
2115	7350 lm
2255	7840 lm
2395	8330 lm
2535	8820 lm
2675	9310 lm
2815	9800 lm
2955	10290 lm
3095	10780 lm
3235	11270 lm
3375	11760 lm
3515	12250 lm

