



DÉFINISSEZ VOTRE ESPACE

Pour chaque zone, il existe une solution de capteur en fonction de ses spécificités.

Hauteur, taille, nature lumière, décoration ou activités qui y sont réalisées

L'emplacement sont des facteurs à prendre en compte lors du choix du capteur idéal.


BEMLIGHT

INSTALLATION

WALL | PAREDE | PARED



CEILING | TETO | TECHO

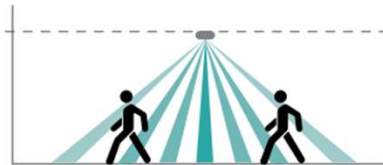

TECHNOLOGIE

DÉTECTEUR INFRAROUGE PASSIF (PIR)

La technologie fonctionne avec la chaleur détection.

Les gens émettent de l'énergie sous forme d'électromagnétique qui est détecté par le et l'active.

AVANTAGES : Espaces extérieurs.

LIMITES : Ce type de capteurs ne fonctionnent qu'avec la détection objet en vue.



DÉTECTEUR À MICRO-ONDES

Le détecteur à micro-ondes

La technologie envoie des hautes fréquences ondule et analyse le retour modèle.

Il fonctionne comme un radar, émettre et recevoir le signal d'une antenne.

AVANTAGES : Une meilleure détection, durée de vie plus longue et peut passer le plastique et verre.

LIMITES : Ce n'est pas conseillé pour l'utiliser à l'extérieur et en petit espaces intérieurs.



BEMLIGHT



JOUR

Le luminaire s'allumera si l'intensité de la lumière ambiante ne dépasse pas la valeur Lux choisie.



DÉLAI

Temps pendant lequel le luminaire reste allumé après la dernière détection.



SENSIBILITE

Réduire ou augmenter la zone de détection et la détection pouvoir.




GRADATION EN VEILLE

Temps et puissance pendant lesquels le luminaire reste allumé jusqu'à ce qu'il soit Éteint.


BEMLIGHT

ST02A

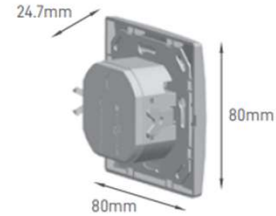


IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	160°	500W	4-9m	10S - 7min	Yes	1-1.8m	No	Wall	Infrared	80x80x24.7mm	48.5x48.5mm	ILAR-00118

ST31

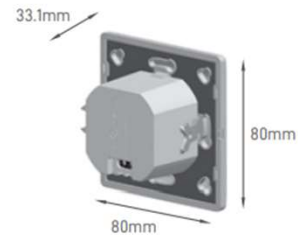

IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	190°	500W	4-9m	10S - 7min	Yes	1-1.8m	No	Wall	Infrared	80x80x33.1mm	48x48mm	ILAR-00495


ST31C

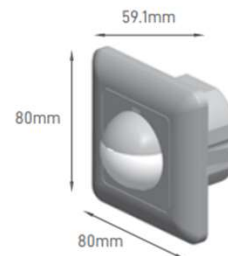

BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
190°	500W	10m max	10S - 7min	Yes	1-1.8m	Wall	Infrared	80x80x59.1mm	50x50mm	ILAR-01059


BEMLIGHT

ST32




IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	160°	500W	9m	10S - 7min	Yes	1-1.8m	No	Wall	Infrared	80x80x33.1mm	48x48mm	ILAR-00258

ST18B

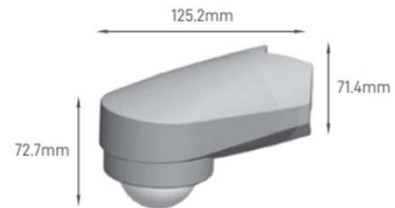

IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	INSTALLATION	SIZE	SKU
IP65	240°	1200W	8m max	10S - 15min	Yes	1-1.8m	Wall	125.2x72x17.4mm	ILAR-01061


ST11



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP44	180°	800W	12m	10S - 15min	Yes	1.8-2.5m	No	Wall	Infrared	80.2x55.5x68.2mm	ILAR-00257


BEMLIGHT

ST09




IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP44	180°	1200W	12m	10S - 7min	Yes	1.8-2.5m	No	Wall	PIR	84.4x2x60.4mm	ILAR-00121

ST15

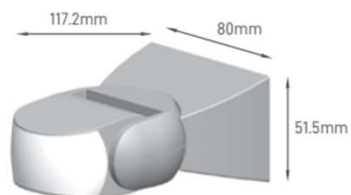

IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	COLOR	SKU
IP65	180°	1200W	12m	10S - 15min	Yes	1.8-2.5m	No	Wall	Infrared	117.2x80x51.5mm	white black	ILAR-00304 ILAR-01954


ST15E



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	180°/360°	1200W	12m	10S - 15min	1.8-2.5m	No	Wall	Infrared	119x80x51.5mm	ILAR-00570


BEMLIGHT

ST15D W/ CONTROLLER

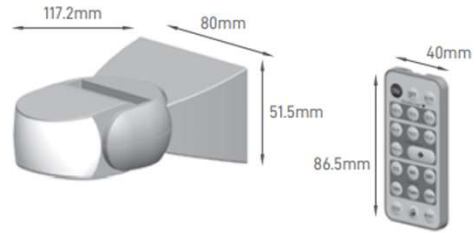


IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP65	180°	1200W	12m	10s - 30min	1.8-2.5m	No	Wall	Infrared	117.2x80x51.5mm	119.5x80x51.5mm	ILAR-00571

ST701E



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP20	180°/360°	1200W	5-15m Wall/ 1-8m Ceiling	10s - 12min	Wall 1.5-3.5m/Ceiling 2-8m	No	Wall/ Ceiling	Microwaves	39.4x54.5x25mm	ILAR-00124

ST24

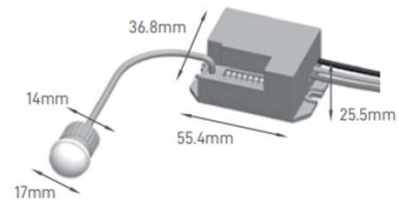

IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	120°/360°	800W	3-6m	5s - 8min	Wall 1.5-3.5m/Ceiling 2-8m	No	Wall/ Ceiling	Infrared	55.4x25.5x36.8mm	Ø14mm	ILAR-00519


BEMLIGHT

ST41



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	COLOR	SKU
IP20	360°	1200W	6m max	10s - 15min	2.2-4m	No	False Ceiling	Infrared	Ø76x75.6mm	Ø61.5mm	White Black	ILAR-00120 ILAR-01955

ST40C



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	COLOR	SKU
IP20	360°	800W	8m max	10s - 15min	2.2-4m	No	False Ceiling	Infrared	Ø81.2x65.1mm	Ø54mm	White Black	ILAR-01179 ILAR-01956


ST40A



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	360°	8m max	10S - 15min	2.2m-4m	No	False Ceiling	Infrared	Ø50x62mm	Ø40mm	ILAR-02054


BEMLIGHT

ST41H

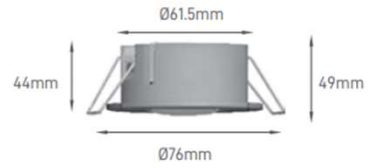

IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	360°	8m Máx.	10s - 30min	1.8m-4m	No	False Ceiling	Infrared	Ø76x49mm	Ø61.5x44mm	ILAR-02031

ST753BR PRESENCE LIGHT



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP54	360°	6m Máx.	10s - 12min	2-4m	False Ceiling	Microwaves	Ø76x66.2mm	Ø61.5mm	ILAR-02159


ST331



IP	BEAM ANGLE	INSTALLATION HEIGHT	DIMMING	INSTALLATION	SIZE	CUT-OUT	SKU
IP20	360°	1.8-4m	1%-100%	False Ceiling	Ø43x43.3x34mm	Ø33mm	ILAR-01865


BEMLIGHT

ST42C

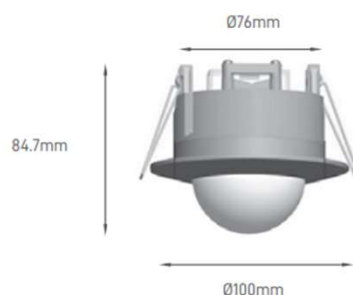


IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	360°	20m Máx.	10s - 30min	2.2-6m	False Ceiling	Infrared	Ø100x84mm	Ø84.7mm	ILAR-02451

ST05DA3 DALI



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP54	360°	20m Máx.	10s - 60min	2.2-6m	False Ceiling	Infrared	Ø102x88.6mm	Ø55mm	ILAR-02287

ST05DA1 DALI



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	SKU
IP54	360°	12m Máx.	10s - 60min	2.2-4m	Ceiling	Infrared	Ø102x51.7mm	ILAR-02286


BEMLIGHT

ST05A



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP44	360°	1200W	6m max	10s - 15min	2.2-4m	No	Ceiling	Infrared	Ø80x41mm	ILAR-00119

ST700BR PRESENCE LIGHT



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP20	360°	6m	10s - 12min	2-4m	No	Ceiling	Microwaves	Ø115x22.5mm	ILAR-02162

ST05C



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	COLOR	SKU
IP20	360°	2000W	6m max	10s - 15min	2.2-4m	No	Ceiling	Infrared	Ø115x24.3mm	White	ILAR-00259
										Black	ILAR-01957


BEMLIGHT

ST05L



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	360°	2000W	8m max	10s - 30min	2.2-4m	No	Ceiling	Infrared	Ø110x27mm	ILAR-01545

ST46B



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	360°	2000W	20m max	10s - 30min	2.2-6m	No	Ceiling	Infrared	102.5x58.8mm	ILAR-01866


ST07B



IP	BEAM ANGLE	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP20	360°	30m Máx.	10s - 15min	2.2m-4m	No	Ceiling	Infrared	Ø103x53.5mm	ILAR-02125

BEMLIGHT

ST759A - 1-10V



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	360°	2000W	4-10m	5s - 30min	4-15m	Yes	Industry / Garages	Microwaves	Ø71.5x59mm	ILAR-00521

ST759B



IP	BEAM ANGLE	DETECTION DISTANCE	INSTALLATION	TYPE	SKU
IP65	360°	8-20m	Industry / Garages	Microwaves	ILAR-02056


ST759D



IP	BEAM ANGLE	DETECTION DISTANCE	INSTALLATION	TYPE	SKU
IP65	360°	8-20m	Industry / Garages	Microwaves	ILAR-02057

BEMLIGHT

ST481C / 19W / 4000K




IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	CUT-OUT	SKU
IP20	360°	19W (2100 Lm)	6m	10s - 15min	Yes	1.8-3m	No	False Ceiling	Infrared	Ø180x66mm	Ø160mm	ILAR-01867

ST77B / 16W / 4000K



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP20	360°	16W (1150 Lm)	6m	10s - 3min	Yes	2-4m	No	Ceiling	Infrared	Ø290x60mm	ILAR-00306


ST77BE / 16W / 4000K / EMERGENCY

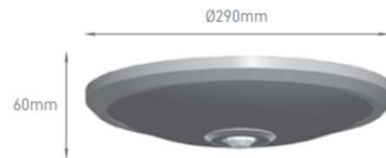

IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP20	360°	16W (1150 Lm)	6m	10s - 3min	Yes	2-4m	No	Ceiling	Infrared	Ø290x60mm	ILAR-01679


BEMLIGHT

ST74 / 20W



IP	BEAM ANGLE	RATED LOAD	COLOR TEMPERATURE	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	360°	20W (2500 Lm)	4000K 3000K	8m	10s - 5min	Yes	2-4m	No	Ceiling	Infrared	Ø300x40mm	ILAR-01062 ILAR-01668

ST705A



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP44	360°	60W (E27)	2-4m	10s - 12min	Yes	2-4m	No	Ceiling	Microwaves	Ø300x112mm	ILAR-00123


ST482 PAINEL



IP	BEAM ANGLE	COLOR TEMPERATURE	RATED LOAD	DETECTION DISTANCE	AMBIENT LIGHTING	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	SKU	
IP20	120° / 360°	3000K-4000K-6000K	18W	Wall: 8m Ceiling: 6m	Yes	10s - 5min	Wall: 1.8-2.5m Ceiling: 2.2-4m	Wall / Ceiling	Infrared	Ø230.7x19mm	ILAR-01868


BEMLIGHT

ST73C



IP	BEAM ANGLE	RATED LOAD	COLOR TEMPERATURE	TOTAL LUMINOUS FLUX (±5%)	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	SKU
IP65	140°	20W	4000K	1900lm	9m	10s - 5min	Yes	1.8m-2.5m	Wall	Infrared	210x210x41mm	ILAR-02126

ST92 / 20W / 4000K



IP	BEAM ANGLE	RATED LOAD	DELAY TIME	AMBIENT LIGHTING	INSTALLATION	TYPE	SIZE	SKU
IP65	140°	20W (1700 Lm)	3s - 5min	Yes	Wall	Infrared	196.5xØ149.3x82mm	ILAR-01060


ST53M / 20W / 4000K



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	INSTALLATION HEIGHT	INSTALLATION	TYPE	SIZE	SKU
IP65	140°	20W (1800 Lm)	9m	3s - 15min	Yes	1.8-2.5m	Wall	Infrared	250x188x66mm	ILAR-01063

BEMLIGHT

ST61 / 16W / 4000K



IP	BEAM ANGLE	RATED LOAD	DETECTION DISTANCE	DELAY TIME	AMBIENT LIGHTING	DIMMING	INSTALLATION	TYPE	SIZE	SKU
IP65	240°	30W (2200 Lm)	5-10m	10s - 15min	Yes	No	Wall	Infrared	199x188x225mm	ILAR-01064